



# ▶ SANTA FE ADVANCE90




OUR MOST POPULAR AND VERSATILE, THE **ADVANCE SERIES** CAN FIT ALMOST ANY APPLICATION AND OFFERS SUPERIOR FILTRATION. THIS UNIT FEATURES DUAL AIRFLOW OUTLETS AND ACCESSORIES FOR ADDED INSTALLATION FLEXIBILITY.

## PERFORMANCE

Water Removal	@ 80°F and 60%RH	@ 70°F and 60%RH
	90 Pints / 11.25 Gallons	71 Pints / 8.875 Gallons
Efficiency	6.1 Pints/kWh	4.9 Pints/kWh
Energy Factor	2.88 L/kWh	2.3 L/kWh
Blower	309 CFM @ 0.0" WG	
Operating Temperature	49°F Min., 95°F Max.	
Crawl Space Sizing	2,200-3,000 Sq. Ft. / 11,000-15,000 Cu. Ft.	
Basement Sizing	2,200-2,600 Sq. Ft. / 22,000-26,000 Cu. Ft.	

## ELECTRICAL


Power	640 watts @ 80°F and 60% RH
Supply Voltage	115 volt – 1 phase – 60 Hz
Current Draw	5.7 amps
Power Cord	9', 115 VAC, Ground  Plug Type B (USA, MEX, CAN, JPN)

## SPECIFICATIONS

Drain Connection	3/4" Threaded Female NPT
Drain Hose	8' Direct Gravity Drain Hose (5/8" ID x 7/8" OD)
Refrigerant	R410A, 1 lb. 5 oz.
Unit Dimensions	14.5"W x 19.4"H x 26"D
Unit Weight	80 lbs.

## SHIPPING

Shipping Dimensions	23"W x 30"H x 40"D
Shipping Weight	95 lbs.
Pallet Quantity	4 per pallet

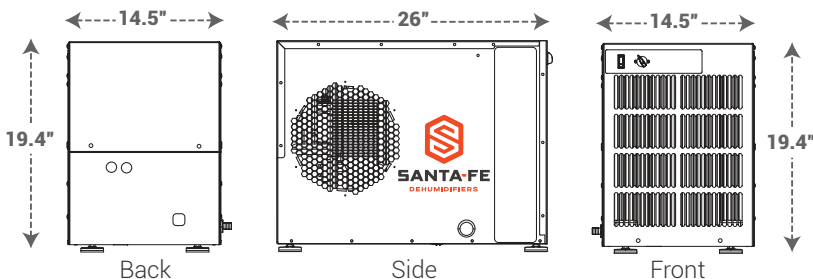

Specifications are subject to change without notice. Water removal is based on pints / gallons per day. Crawl space sizing based on 5 foot ceiling height. Basement sizing based on 10 foot ceiling height.

## FEATURES

- + Dual exhaust outlets allow for air distribution to multiple locations
- + Horizontal cabinet is conveniently sized for installation in crawl space or basement
- + Engineered for low temperature operation and the air flow issues that crawl spaces present
- + Ducting options for divided spaces
- + Auto restart allows the dehumidifier to automatically restart after a power outage



**SANTA-FE**™  
DEHUMIDIFIERS



**BUILT TO LAST. BUILT TO PERFORM.**