



SANTA FE COMPACT 70


SMALL BUT TOUGH, THE **COMPACT SERIES** FITS INTO TIGHT SPACES WHERE OTHER DEHUMIDIFIERS SIMPLY CAN'T. EXTREMELY POWERFUL AND EFFICIENT, IT TACKLES EXCESS HUMIDITY TO CURB HARMFUL MOLD GROWTH IN THE HARSHTEST OF CONDITIONS.



PERFORMANCE

Water Removal	@ 80°F and 60%RH 70 Pints / 8.75 Gallons	@ 70°F and 60%RH 47 Pints / 5.875 Gallons
Efficiency	5.0 Pints/kWh	3.9 Pints/kWh
Energy Factor	2.4 L/kWh	1.9 L/kWh
Blower	150 CFM @ 0.0" WG	
Operating Temperature	49°F Min., 95°F Max.	
Crawl Space Sizing	1,800-2,600 Sq. Ft. / 9,000-13,000 Cu. Ft.	
Basement Sizing	1,800-2,200 Sq. Ft. / 18,000-22,000 Cu. Ft.	

ELECTRICAL


Power	580 watts @ 80°F and 60% RH
Supply Voltage	115 volt – 1 phase – 60 Hz
Current Draw	5.1 amps
Power Cord	9', 115 VAC, Ground  Plug Type B (USA, MEX, CAN, JPN)

SPECIFICATIONS

Drain Connection	3/4" Threaded Female NPT
Drain Hose	8' Direct Gravity Drain Hose (5/8" ID x 7/8" OD)
Refrigerant	R410A, 15 oz.
Unit Dimensions	12"W x 12"H x 21"D
Unit Weight	55 lbs.

SHIPPING

Shipping Dimensions	18"W x 18"H x 27"D
Shipping Weight	64 lbs.
Pallet Quantity	15 per pallet

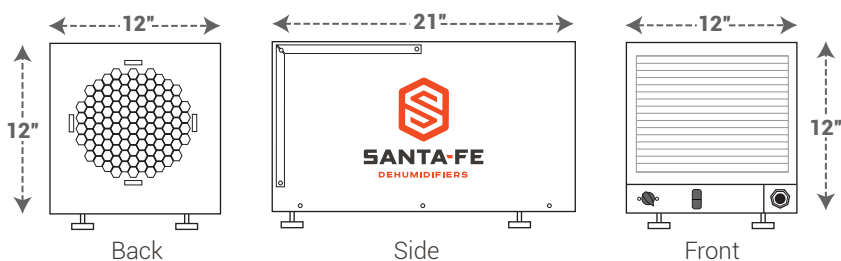

Specifications are subject to change without notice. Water removal is based on pints / gallons per day. Crawl space sizing based on 5 foot ceiling height. Basement sizing based on 10 foot ceiling height.

FEATURES

- + Small footprint (12"x12"x21") fits low crawl spaces, basement mechanical closets, or other small spaces
- + Sized to fit between floor joists for convenient hanging installation
- + Rotatable exhaust outlet provides for horizontal or vertical discharge
- + Engineered for low temperature operation and the air flow issues that crawl spaces present
- + Ducting options for divided spaces
- + Auto restart allows the dehumidifier to automatically restart after a power outage



SANTA-FE™
DEHUMIDIFIERS



BUILT TO LAST. BUILT TO PERFORM.